




## American Series 8 Inch Wireless Digital Clocks

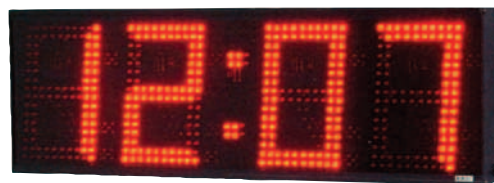

### GENERAL INFORMATION

- Power: ..... 120vac, 60Hz (other power options available)
- Power Consumption: ..... 4-digit - 15VA  
6-digit - 50VA
- Enclosure: ..... Black anodized aluminum
- Mounting: ..... Wall mount bracket included
- Size: ..... 4-digit - 10"h x 30"w x 3 1/2"d  
6-digit - 10"h x 46"w x 3 1/2"d
- Visibility: ..... 200 feet
- Operating mode: ..... 12 or 24 hour selectable from SiteSync IQ® system controller
- Daylight Saving Time Adjustment: .... Automatic from SiteSync IQ® system controller
- Time Accuracy: ..... ±1 second to SiteSync IQ® system controller (syncs every minute)
- Reception Indicator: ..... Colons flash upon signal reception
- Operating Temperature: ..... 32°-122° F
- Operating Humidity: ..... 0 to 95% non-condensing
- Storage Temperature: ..... -40°-176° F
- Weight: ..... 4-digit - 9 lbs.  
6-digit - 15 lbs.
- Warranty: ..... Two Years

**Note:** These clocks are intended for use with a SiteSync IQ® Wireless Clock System.

### ORDER INFORMATION

Part No.	Description
SQA841RSA	120vac, 8", 4-digit, red, single-sided, surface mount, Molex® connector
SQA861RSA	120vac, 8", 6-digit, red, single-sided, surface mount, Molex® connector
SQA841RSP	120vac, 8", 4-digit, red, single-sided, surface mount, cord & plug
SQA861RSP	120vac, 8", 6-digit, red, single-sided, surface mount, cord & plug

**Note:** For Message/Countdown add-on, add C and the circuit number (1-6) to the end of the part number.  
i.e. SQA84RSAC1

At American Time & Signal, we continually strive to improve our products to meet our customers' needs and to provide the best possible value. The above specifications are believed to be correct, are subject to change without notice and may otherwise vary from the above. Please call if you need verification of any specifications or the suitability of a particular product for a particular application. © American Time & Signal Company